



- 单作用设计，荷载回程
Single-acting, load return
- 薄型设计用于狭小空间
Flat design for use in confined spaces
- 机械螺母锁紧，提供长时间支撑安全保障
Safety locknut for mechanical load holding
- 油缸设计可承受相当于额定载荷5%的侧向荷载
Special design withstands side load forces up to 5% of rated cylinder capacity
- 集成球面鞍座，适应顶面不平整情况
Integral tilting saddle on all models
- 配合C70F04快换母接头和DC04防尘帽
C70F04 couplers included on cylinder

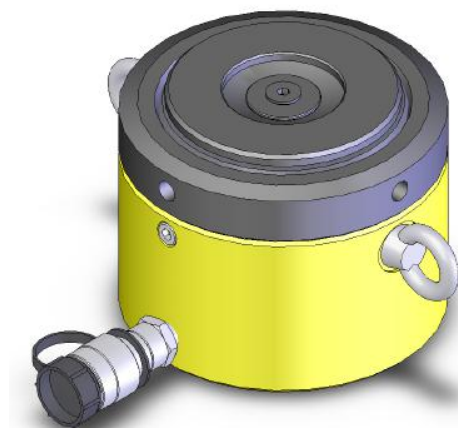

1. 技术参数 Technical parameters

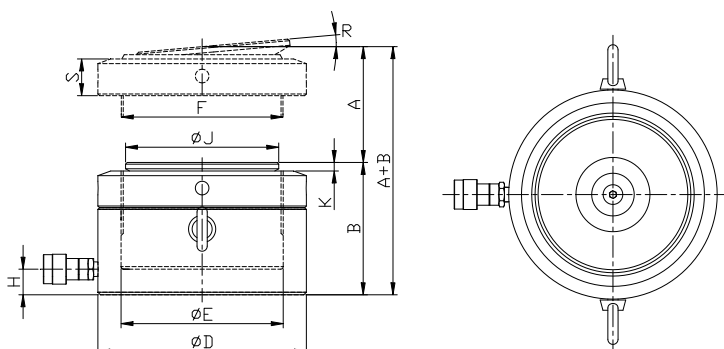

	SLP 系列薄型单作用机械锁紧油缸 SLP series flat locknut cylinder						L13006.1 V1.0 09/2013	
	最大推力至 500TON			工作压力 70MPa				

油缸型号 Model Number		SLP602	SLP1002	SLP1602	SLP2002	SLP2502	SLP4002	SLP5002
最大承载力(kn) Max. Capacity		603	1025	1616	1994	2567	3911	5110
油缸有效面积(cm ²) Effective Area		86.2	146	231	284.8	366.8	558.5	729
液压油容积(cm ³) Oil Capacity		388	657	1038	1998	1650	2514	3281
有效行程 (mm) Stroke	A	45	45	45	45	45	45	45
本体高度(mm) Collapsed Height	B	125	137	148	155	160	178	192
油缸外径(mm) Outside Diameter	D	140	175	220	245	275	350	400
油缸内径(mm) Bore Diameter	E	104.8	136.6	171.5	190.5	215.9	266.8	304.8
油缸杆径(mm) Plunger Diameter	F	Tr104X4	Tr136X6	Tr171X6	Tr190X6	Tr215X6	Tr266X6	Tr304X6
进油口高度(mm) Base to Adv. Port	H	19	21	27	30	32	39.5	48
鞍座直径(mm) Saddle Diameter	J	96	126	160	180	200	250	290
鞍座凸出高度(mm) Saddle Protrusion from Plunger	K	6	8	9	10	11.5	11.5	10
偏转角度 (°) Rotation Angle	R	5	5	5	5	5	4	3
锁母厚度 (mm) Locknut Height	S	23	31	40	43	43.5	55	62
重量 (kg) Weight		14.4	24.7	41.3	54.3	69.7	126.5	180.9